



Gerenuk® 500 Multilifter

Made in Denmark
Pat. pend.

Gerenuk® 500 is a hydraulic, remote-controlled multilifter that can be adapted to all telescopic loaders, cranes and other lifting gear to lift practically every known building material.



Unique handling

3D manipulation



Unique
3D
manipulation

The strong, and extremely precise head, on which the front system is mounted, has a sturdy design which means that the front system can rotate and tilt the elements in all directions. Consequently, the mounting options are almost unlimited.

Millimeter precise



Power is a factor, if you can control it. With the Gerenuk® 500 you can fit elements millimeter precise with the sensitive remote control. The whole HHI concept of Power & Precision applies to its full extend in the Gerenuk® 500 handling abilities.

Unique safety

400% overcapacity



A two-circuit vacuum system ensures that the suction discs always have 400% overcapacity. A visual - and an acoustic alarm ensure that the machine is not operated until the system has reached optimum suction power. This makes the vacuum system one of the safest systems in the world.

Unique
3D
manipulation

The primary unique feature of the Gerenuk® 500 is the ability to manipulate materials 360° in all directions. You can approach the mounting area from any angle, and adapt the load with the 3D feature. That is second to none.

Unique service

Remote service



The Gerenuk® 500 can go online and be remotely serviced. This enables speedy diagnostics, remote programming and tailored repairs. The onboard computer supervises all systems and reports any damage.

All round adaptability



You can adapt the Gerenuk® 500 to lifting any kind of building material, and you can mount the machine on any lifting host machine in your garage. Mount materials from 0 to 110 meters millimeter precise.




Gerenuk[®] 500 Multilifter

Made in Denmark
Pat. pend.

Technical data


Description	Value
Loading capacity	500 kg
Own weight	720 kg
Adaptor weight	Type specific
Machine min. width	1100 mm
Machine min. depth	900 mm
Machine min. height	1750 mm
Autonomy	8 hours
Side shift	200 mm
Telescopic arm	420 mm
Charging current	220 or 110 V
Battery specs.	2 x 152 Ah / 24 V
Charging time	10-100 % - 8 hours
Charging time	25-70 % - 1 hour

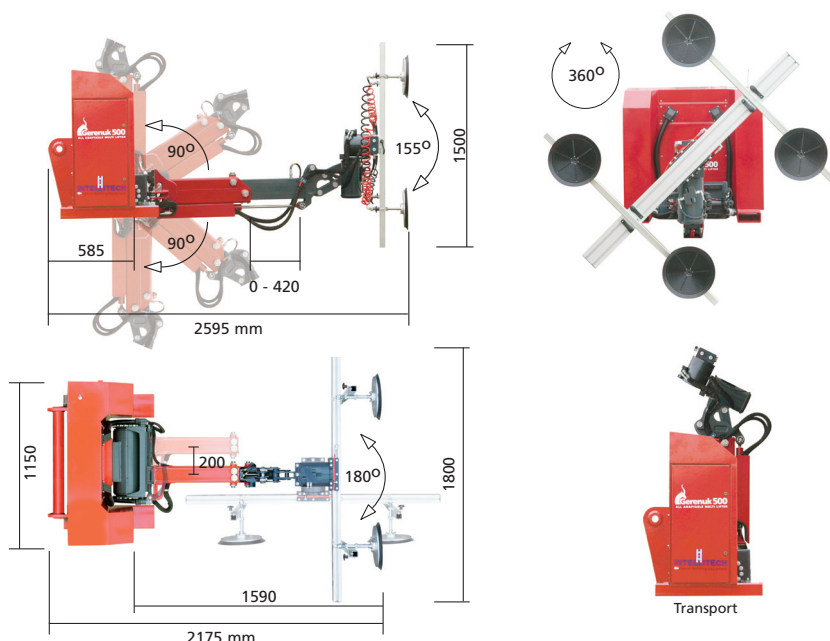

Gerenuk[®] 500 complies with the requirements
of Machinery Directive 2006/42/EC.


Please contact AMS to book a demonstration.

For latest updates please visit
www.hh-intellitech.dk

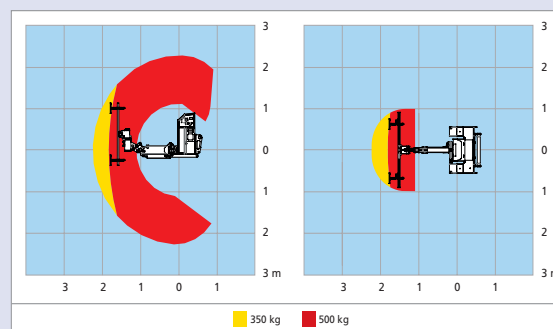

Unique adaptability

Materials

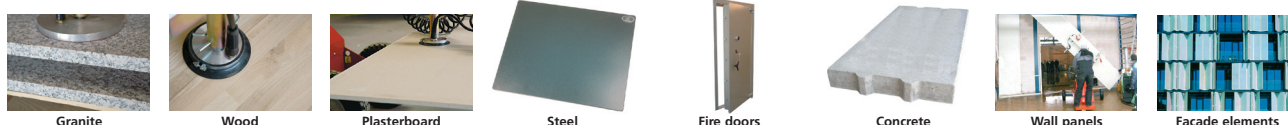

Host machines

Mount the Gerenuk[®] 500 on
any hostmachine already in
your possession.
Mount building materials
from 0 to 100 meters.



Dealer:

Assorted Machinery & Services Pty. Ltd.
Australian Dealer for HH-Intellitech (Excluding W.A.)

Ph: (03) 9807 5834
Mobile: 0458 122 880

Email: steve@amshhi.com.au
www.hh-intellitech.dk

AMS
Assorted Machinery & Services Pty. Ltd.